



TEST REPORT

Reference No : 821-LU6178-R01 ver. 0

Applicant..... : VALUXILLUMINACION

Address. : POL.OLIVERAL NORTE FASEIII NAVE 19, 46190 RIBA-ROJA DE TURIA
VALENCIA ESPANA.

Manufacturer. : VALUXILLUMINACION

Address. : POL.OLIVERAL NORTE FASEIII NAVE 19, 46190 RIBA-ROJA DE
TURIA VALENCIA ESPANA.

Product Name..... : Wall Surface Mounted luminaire

Model No : Sophia 1D/2D

Ratings : 200-240V~, 50-60Hz, MAX 35W GU10

Standards..... : IES LM-79-08
Electrical and Photometric Measurements of Solid-State Lighting
Products

Date of Receipt sample : 07-09-2018

Date of Test..... : 10-09-2018 to 11-09-2018

Date of Issue..... : 12-09-2018

Test Report Form No. : 102-LM790887A-01B

Test Result..... : See the attached sheets

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:
VALUXILLUMINACION

Avda. Miguel Hernández 27 46960 Aldaya-Valencia, Spain

Complied by:

Ing. Feliciano Bertina

Test engineer

Approved by:

Ing. Michael Paschier

Reviewer

VALUX ILLUMINACION, S.L.
C.I.R. 8-98.329.097
C/. Morvedre.30-B
16117-BETERA (Valencia) SPAIN

Measurement Point: N
Characteristic data (not shown on the marking plate) N
Purpose of the product (Description of intended use) LED flood lighting for generally lighting purpose. Other information refers to photos in end page.
Possible test case verdicts: - test case does not apply to the test object:..... N(.A.) / not included in the order - test object does meet the requirement..... P(ass) - test object does not meet the requirement: F(ail) Possible suffixes to the verdicts: - suffix for detailed information for the client : - C(omment) - suffix for important information for factory inspection ...: - M(anufacturing)
General remarks: "(See Attachment #)" refers to additional information appended to the report. "(See remark #)" refers to a remark appended to the report. "(See appended table)" refers to a table appended to the report. Throughout this report a comma is used as the decimal separator. Remark: 1. Measurement was conducted at voltage 240VAC 50Hz and at a stable ambient temperature 25°C±1°C.

Test summary:

Testing is performed in accordance with the procedures outlined in IES LM-79-08. The sample is evaluated for photometric and electrical characteristics using an integrating sphere and a goniophotometer, located in an accredited, temperature and humidity-controlled, draft free photometric laboratory.

☒ Test No. 1 : Integrating Sphere Test

The sample was tested according to the IES LM-79-08.

Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$.

The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load. The AC power supply, while operating the product, shall have a sinusoidal voltage waveshape at the prescribed frequency 50Hz or 60Hz such that the RMS summation of the harmonic components does not exceed 3 percent of the fundamental during operation of the test item. It was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.

☒ Test No.2: Goniophotometer Test

The sample was tested according to the IES LM-79-08.

Photometric parameters were measured using a type C goniophotometer and software.

The ambient temperature shall be maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$, measured at a point not more than 1 m from the sample and at the same height as the sample.

The sample was operated at Rated Volts (see Table 1). The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load. The AC power supply, while operating the product, shall have a sinusoidal voltage waveshape at the prescribed frequency 50Hz or 60Hz such that the RMS summation of the harmonic components does not exceed 3 percent of the fundamental during operation of the test item. It was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 1° vertical intervals and 15° horizontal intervals and chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm by center test position.

IES LM-79-08			
Clause	Requirement – Test	Measuring result – Remark	Verdict
2.0	Ambient Conditions		P
2.1	General		P
2.2	Air Temperature		P
2.3	Thermal Condition for Mounting SSL Products		P
2.4	Air Movement		P
3.0	Power Supply Characteristics		P
3.1	Waveshape of AC power supply		N
3.2	Voltage regulation		N
4.0	Seasoning of SSL Product		N
	No seasoning of SSL product		N
5.0	Stabilisation of SSL Product		P
	SSL product has sufficiently stabilized before measurement	Stabilized 30 minute	P
6.0	Operation Orientation		P
	SSL product shall be stabilized and measured in intended operating orientation	As normal working	P
7.0	Electrical Settings		P
	SSL product shall be operated at rated voltage		P
	SSL product with dimming capability are tested at maximum input power condition		N
	SSL product with different modes are measured in all relevant modes		N
8.0	Electrical Instrumentations		P
8.1	Circuits		P
8.2	Uncertainties		P
9.0	Test Methods for Luminous Flux measurement		P
9.1	Integrating sphere with a spectroradiometer (Sphere-spectroradiometer system)		P
9.2	Integrating sphere with a photometer head (Sphere-photometer system)		N
9.3	Goniophotometer		P
10.0	Luminous Intensity Distribution		P
	Reporting acc. to IES LM-63		P
11.0	Luminous Efficacy		P
	Calculation	See table 1	P
12.0	Test Methods for Color Characteristics of SSL Products		P
	Measurements	See table 1	P
13.0	Uncertainty statement		N


Table 1	Test data		
Model:	Sophia 1D/2D		
Rated Voltage:	200-240VAC	Rated Power (W):	7W
Rated luminous flux (lm):	N	Ambient temperature 25 ±1 (°C):	Refer to below table
Test item	Measured Value		
	Integrating Sphere		Goniophotometer
Key Photometric Results			
Luminous Efficacy (Lumens/Watt)	---		110,1
Total Luminous Flux (Lumens)	---		749,7
Peak Intensity (cd)	---		8116
Total Radiant Flux (Watts)	---		---
Correlated Color Temperature (CCT)	3034K		---
Color Rendering Index (CRI)	80,0		---
Chromaticity (Chroma x / Chroma y)	0,4345/0,4032		---
Chromaticity (Chroma u' / Chroma v')	0,2494/0,5207		---
Duv Value	-2,99e-05		---
Stabilization Time (Light and Power) (Minutes)	30		30
Total Run Time (Minutes)	35		90
Electrical Input Results			
Input Power (Watts)	---		59,8
Input Voltage (Volts AC)	---		239,9
Input Current (Amps)	---		0,256
Input Frequency (Hertz)	---		50
Power Factor	---		0,976
Additional Information			
Test Geometry Configuration	4π		Type C
Ambient Temperature (°C):	25,1		24,9
ISTMT (In-Situ Temperature Measurement) (°C):	N		
Supplementary Information:			
<div><div>-</div>Absorbtion Correction used: NO</div> <div><div>-</div>Stabilisation was considered reached by: the variation (maximum-minimum) of at least 3 readings of the light output and electrical power over a period of 30 minutes is less than 0,5%.</div>			

LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.24V I:0.0640A P:13.161W PF:0.8869 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:750.12x1 lm		
NAME: Sophia 1D-2D-7W-3000K	TYPE: 7W	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 107.31 lm/W			
MODEL	Sophia 1D-2D	Imax(cd)	491.5	S/MH(C0/180)	1.21
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.23
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	750.4	η UP,DN(C0-180)	0.0,50.2
NOMINAL FLUX(lm)	750.41	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.8
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	231.3	η down(%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

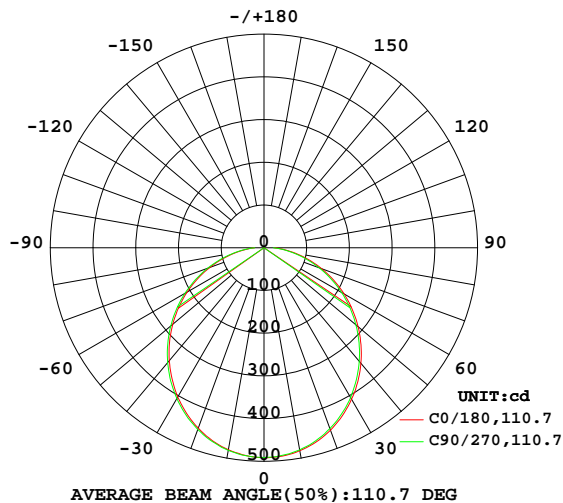

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

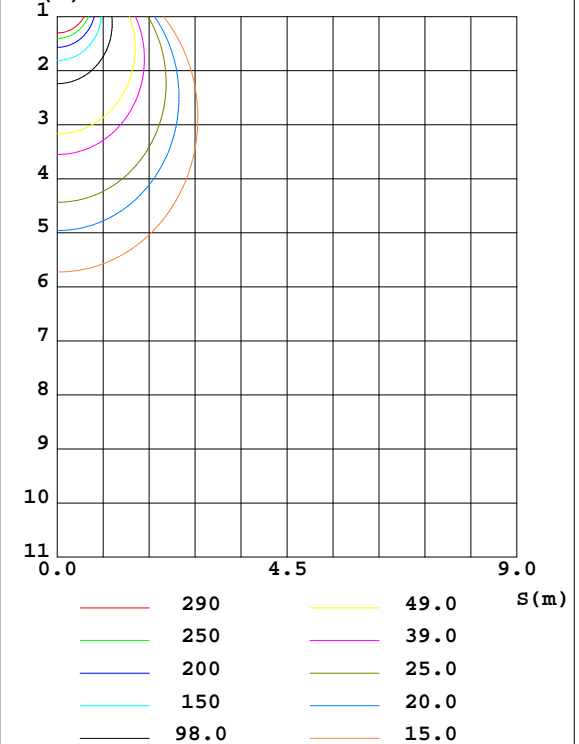

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-10

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]